Linear Actuator

4-Axis Controller

28. HIWIN 4-Axis Controller

LAK4D

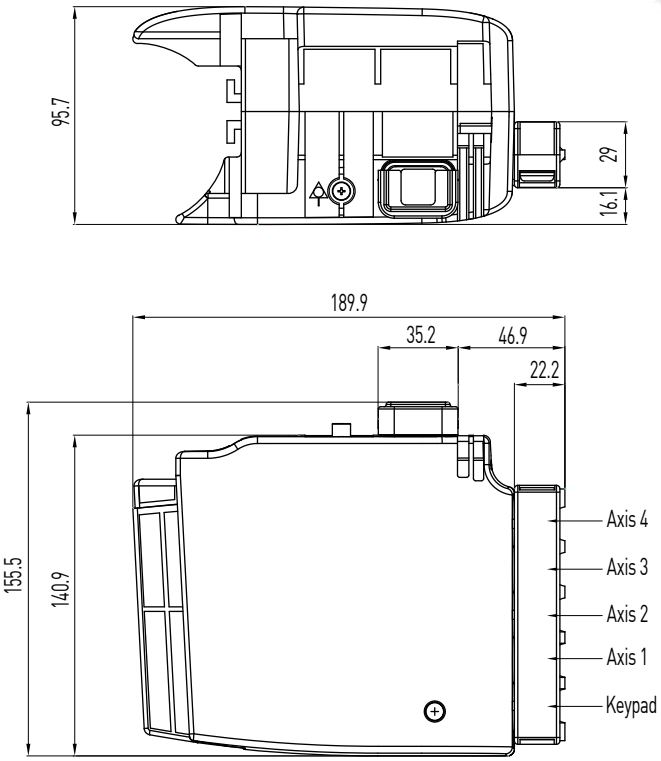

Table 28.1 **Specifications**

Input voltage	AC 100 / 110 / 120 / 220 / 230V (50/60Hz)
Output power	72.5VA (24VDC) max.
Duty cycle	10%
Protection	IP54
Working temp.	+5°C~40°C

Option:

(1) IP66
(2) Output power: 144VA, 216VA
(3) UL Version

Features of LAK4D

- Control 1 to 4 Linear Actuator
- Standard cable length: 4M
- Detachable cable retainer (protection against accidental unplugging)
- Removable AC power cable.
- LED power display.
- Can be mounted directly on the LAN5.
  (LAN5 min. RL must be greater than 300mm)

* Notes: LAK4D without over current protection.

LAK4D can be mounted with LAN5

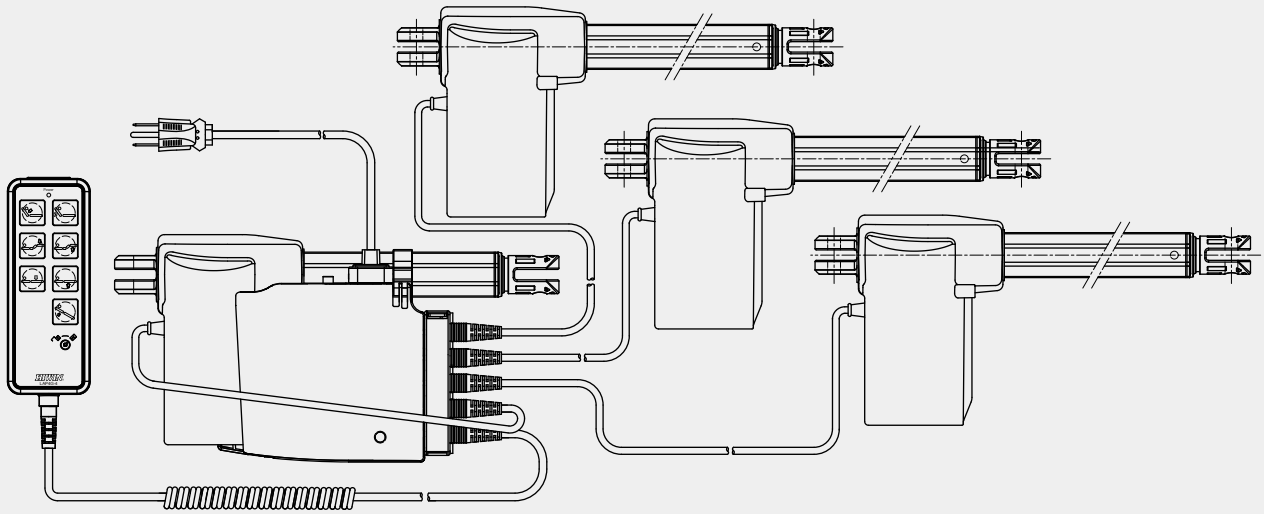

Ordering Information

LAK4D - D000 - 110 - G E

Actuator No.1~4	Input Voltage	Color	Special models according to Client's requirement
0: None	100: AC100V; 110: AC110V	B: Black	None
A~H: Only indicate the actuator maximum current, not indicate over current setting value.	220: AC220V; 230: AC230V 120: AC 120V	G: Gray	E = Special requirement